Fermilab

Sensitivity of an Energy Doubler

Dipole to Beam Induced Quenches

B. Cox, P. O. Mazur and A. Van Ginneken

November 1978

ABSTRACT

In a series of tests in the P-West proton beam a doubler dipole (E22-12) was exposed to various intensity 400 GeV/c beams with several types of spills. Results are presented for the sensitivity of this magnet to beam induced quenches and operation of the superconducting dipole in a proton beam over a three month period is discussed.

The question of the amount of beam loss which will quench a superconducting magnet has taken on special importance at this time because of the plans for the 1000 GeV Energy Doubler. A question of secondary importance but of interest is what operational difficulties may be encountered during the long term operation of superconducing magnets in a beam line. For a period of three months an Energy Doubler dipole (E22-12) was operated in the P-West beam line with proton beams in the range 10^7-10^{12} passing through it. During this time a special series of tests was conducted to determine the amounts of μsec, 1 msec and .5 second slow spill beam loss that would induce quenches in this magnet.

The geography of the installation is shown in figures 1a and 1b and the schematic of the helium refrigeration system used to cool this magnet is shown in Fig. 2a. As shown, the installation was situated in the P-West line and the doubler dipole in normal operation performed the function of bending the incident 400 GeV proton beam 10.375 mradians onto the High Intensity Laboratory target. The nominal current required for this standard operation was approximately 2300 amps which was provided by a 500 kw Transrex power supply. The helium refrigeration for this magnet was provided by a CTI 1400 refrigerator which in standard liquefaction mode operation produced 30-40 liters/hour into a 450 liter dewar pressurized to 4.5 psig. The dewar pressure was then raised to 8 psig and liquid was transported from this dewar via a 100 foot transfer line to a counterflow heat exchanger (subcooler) before entering the doubler dipole coil region as a single phase fluid. In

standard operation the pressure of this region was 23 psia corresponding to a saturation temperature of 4.73° K. The helium was subcooled by $\sim 0.05^{\circ}$ K. The single phase liquid then passed through the magnet to a Joule-Thompson valve into the two phase region, which is in thermal contact with the single phase region. The helium, at this point a boiling two phase mixture, passed back through the subcooler and to the refrigerator cold return. A battery of three compressors (Schramm, CTI, and APCI) provided 10.8 g/sec at 240 psig for the CTI 1400 during an average operating period. The Joule-Thompson valve was operated in both manual and automatic modes. In automatic mode, the valve was controlled using the temperature difference between the gas returning from the sub-cooler to the refrigerator and its saturation temperature. This was accomplished by measuring the pressure difference between the returning gas and a vapor pressure bulb in the gas stream. A pressure difference of 1-2 psi, corresponding to a temperature of $0.05-0.1^{\circ}$ K above saturation, was used. It was found that, due to the long response times of the system to changes in flow (of order 5 minutes), that more stable operation could be obtained by setting the J-T valve manually. A 1-2 psi pressure drop across the valve resulted in stable operation with a constant dewar pressure of about 8 psig and a refrigerator return pressure of about 6 psig. Heat transfer in this early version of the Doubler magnet was insufficient to maintain subcooling, and the vapor pressure thermometer just before the J-T valve indicated the helium there was saturated. Recovery from the various types of quenches (either

accidental or intentional) with this system seemed to depend mainly

on the current at which the magnet was operating. The time of

recovery varied roughly from 5 minutes at 2500 amps to 15 minutes at

3500 amps. The quench detection and energy dump circuitry is shown

schematically in Fig. 2b along with a typical current decay curve

for a typical beam induced quench. E22-12 was an early model of an

Energy Doubler magnet which had been trained to 4800 amps and

normally would have operated with a 20^O K helium shield. Because of

a thermal short in the lead box from this shield to the 4^O K two

phase region it was found that the most efficient mode in which to

operate the magnet was with the shield shut off. In this mode one

shift operation was possible before the system would have to be

shut down to refill the dewar either with the refrigerator or from

reserve dewars. During the three month period we performed over 35

cool downs from 30^O K to 4^O K and approximately 10 cool downs from

300^O K to 4^O K. The magnet was subjected to approximately 100

quenches, 60 of which were beam induced either in normal 2300 amp

operation or at the other magnet currents used during the special

quench tests discussed below. It is noteworthy that only two or

three of these quenches during the three months of operation could

be attributed to accelerator malfunctions such as beam missteering

or accidental high intensity pulses. The position stability of the

beam was remarkable and the intensity stability (less than a factor

of ± 3) of the beam was reasonable. When the magnet was set to

target protons and was left unattended no drifting occurred and, as

mentioned, only a few accidental quenches were experienced. No

discernable deterioration of the doubler magnet occurred durin(

this usage.   This experience leads us to be optimistic abou1

routine operations of Doubler magnets in external beam line:

(exclusive of the possibility of beam induced quenches).

To explicitly measure the quench properties of this doubler

dipole, time was set aside for a set of tests of this magnet when

exposed to slow, msecond, and μsecond spills of varying intensi-

ties. In these tests we attempted the following measurements:

1) Protons required to induce a quench using slow, msecond,
   and μsecond spills with the 400 GeV beam impacting the coil
   region in a grazing trajectory (Geometry I, Fig. 3a).

2) Protons required to induce a quench with the 400 GeV beam
   impacting the upstream end of the magnet in an island
   region (Geometry II, Fig. 3b).

3) The protons required in Geometry II to induce a quench with
   the 400 GeV beam as a function of magnet current.

4) Protons required in Geometry II to quench the magnet for
   different beam spot sizes.

Figure 3c shows the relative position of the coils and the bore

tube. The impact angle of the beam on the coil region in the

grazing configuration of Geometry I is 10.75 mradians and the

impact region starts approximately 60 inches from the downstream

end of the magnet when the magnet is run at 3500 amps. A   crude

measure of the relative energy dump at various intensities was

provided by a pair of coupled ion chambers (loss monitors) positioned on the downstream end of the doubler magnet. The temperature of the magnet was monitored by a vapor pressure thermometer situated in the single phase helium volume at the downstream end of the magnet. Incident beam intensity was measured by a battery of ion chambers and secondary emmission monitors up-stream of the dipole.

Figure 4 shows the response in Geometry I of the loss monitor vs. the 400 GeV proton beam intensity. As shown in Fig. 4, the quench points of E22-12 were measured a number of times for four different types of spill; .5 sec slow spill, 1 msec fast spill, μsec spill with four 1.6 μsec booster bunches spread uniformly around the main ring and μsec spill with two 1.6 μsec booster bunches adjacent to one another. A Monte Carlo shower calculation was performed to estimate the energy densities of the hadronic and electromagnetic showers caused by the impact of the beam in both Geometry I and II. An elliptical beam spot of 18 x 15 mm with a gaussian distribution along the principal axis was used in the calculation. Approximately 95% of the beam was contained within this ellipse. This profile was consistent with the beam profiles measured on the beam monitors during all phases of the tests. For Geometry I the largest energy density is predicted to occur in the inner turn at the midplane and is approximately .75 GeV/cm^3 per incident proton. It is estimated that the energy density is accurate to approximately 25%. The temperature of the single phase coil region was monitored to be $4.78 \pm .05^\circ$ K before beam impact

for all the quenches. The magnetic field in the region of maximum

energy density at 3500 amps is estimated to be 3.5 T. The variation

of short sample limit with temperature for the doubler conductor is

such that at 6.2^{O} K the critical current will be exceeded for this

magnet at 3500 amps. This corresponds to an allowable Δ T of 1.4^{O} K

which in turn corresponds to an allowable energy density of 9.8

mjoules/cm^{3}. From the results of the shower calculations the maxi-

mum beam that could impact the coil without quenching (in the

absense of heat transfer mechanisms) would be approximately 8 x 10^{7}

protons. As shown in Fig. 4, slow spill quenches occur at

approximately 4-5 times this level at 3 x 10^{8} protons per .5

seconds. When the msecond fast spill was measured we saw a marked

increase in the sensitivity of the magnet with the quenches

occurring at 10^{8} protons. Finally for the μsecond spills we saw a

slight increase in sensitivity with the quenches occuring typically

at 7-8 x 10^{7} protons. As shown in Fig. 4 there was a further small

increase in sensitivity when the μsecond spill structure was

changed from four 1.6 μsecond bunches spread evenly over 20

μseconds to a "faster" μsecond spill with two 1.6 μsecond bunches

adjacent to one another. While this change is probably not

significant there still may be some heat transfer effects present

at this level. The dotted line shows the upper limit on acceptable

targeted beam in this geometry which is predicted by our simple

calculation. As can be seen this is very close to the quench

points measured with the μsecond and msecond spills.

A second measurement of the sensitivy of E22-12 was done in the beam impact geometry shown as Geometry II in Fig. 3b with the .5 second slow spill. The results of this "perpendicular" impact measurement are shown in Fig. 5. A different slope of loss monitor vs. beam intensity is obtained, of course, since the targeting geometry is different. The major observation is that the quench point occurs at a factor of 10 higher intensity ($\sim$2-3 x 10^9 protons). This is because the beam is initially striking an island and not a coil region in the dipole. This interpretation is approximately supported by the result of a shower calculation for Geometry II which predicts a maximum energy density roughly a factor of 10 less than the maximum density calculated for Geometry I. This shower calculation is analogous to that performed for Geometry I. The maximum energy density in the coil region is calculated to be 30-40 cm into the magnet and was .078 GeV/cm^3 per incident proton. This energy density was roughly independent of the magnetic field for 3.5T and 0.4T. In Geometry II we tried two other measurements. In order to determine whether the magnet was at a uniform temperature and to try to detect the possible existence of gas pockets in the coil region the beam was targeted both above and below the gap. As Fig. 5 shows, there is a slight increase in sensitivity when the beam is targeted in the upper position. This is probably within the scatter of the quench points for identical geometries. The second type of measurement was made by increasing the spot size to lower the energy density of the shower. A slight decrease in sensitivity is seen for this larger spot. Once again the decrease is slight but seems to go in the proper direction.

As a final measurement of the sensitivity of this dipole to beam, the variation of the slow spill quench point with magnet current was measured. The results are shown in Fig. 6. Between 420 amps and 3500 amps there is an increase of an order of magnitude in the sensitivity of E22-12. In exercising this magnet without beam we found that spontaneous or training type quenches began to occur between 3900 and 4000 amps (the magnet had been trained to 4800 amps but at a lower temperature). When we set the magnet at 4000 amps we found a marked increase in sensitivity with the magnet quenching at the 10^7 proton level. This phenomenon was reproducible.

In conclusion, we have measured the quench behavior of an Energy Doubler dipole. The results of our measurements appear (at the level thus far studied) to indicate that the quench behavior of this magnet can be predicted by a shower calculation and the assumption is approximatly correct that no heat transfer mechanism is rapid enough to carry off an appreciable amount of beam energy in the case of the μsecond spill. In the case of .5 second slow spill approximately an order of magnitude more beam can be tolerated than in the case of μsecond spill. There is also a systematic variation of the quench point of the doubler dipole with field which allows an order of magnitude more slow spill beam to be scraped at 420 amps (Energy Doubler injection current) than at 3500 amps. These measurements are summarized in Table I.

Finally, a number can be quoted for the sensitivity of the doubler magnet to beam. The instantaneous energy density must be kept below

9.8 mj/cm^3 or 950 µj/linear cm of 23 strand   for 3500 at 4.8$^{\mathrm{O}}$K
                  doubler conductor

5.2 mj/cm^3 or 500 µj/linear cm of 23 strand   for 4250 at 4.3$^{\mathrm{O}}$K
                  doubler conductor   (Nominal Doubler
                                                         operating parameters)

We would like to acknowledge many conversations with Helen Edwards which helped tremendously in defining and clarifying this problem.

TABLE I

Type of Spill	Magnet Current (amps)	Beam Intensity
.5 sec-Geometry I	3500	3×10^8
msec-Geometry I	3500	$1. \times 10^8$
μsec, 4 bunches – Geometry I	3500	$.7 \times 10^8$
μsec, 2 bunches – Geometry I	3500	$.5 \times 10^8$
.5 sec-Geometry II	420	4×10^{10}
	1000	1.7×10^{10}
	1500	1.2×10^{10}
	2000	7×10^9
	2500	4.5×10^9
	3000	3.7×10^9
	3500	2×10^9
	4000	2×10^7

FIG. IA

TM-828-A
1620.000

CT1 COMP.

APC1 COMP.

SCHRAMM COMP.

DEWAR

CT1-1400

DUMP

CH700

BEAM STOP

LOSS MONITOR

SUBCOOLER

MAGNET V PT

DOUBLER DIPOLE

LEAD BOX

TV622

QH621-2

QH621-1

QV620-2

QV620-1

DIPOLE

FIG. 1B

TM-828-A
1620.000

COMPRESSORS

CTI
1400

100 FOOT
TRANSFER LINE

450 LITER DEWAR

DIFFERENTIAL PRESSURE CONTROLLER

V.P.T.

SUBCOOLER

J.T. VALVE

COOL DOWN VALVE

2 Ø REGION

1 Ø REGION

E 22-12 MAGNET

MAGNET V.P.T.
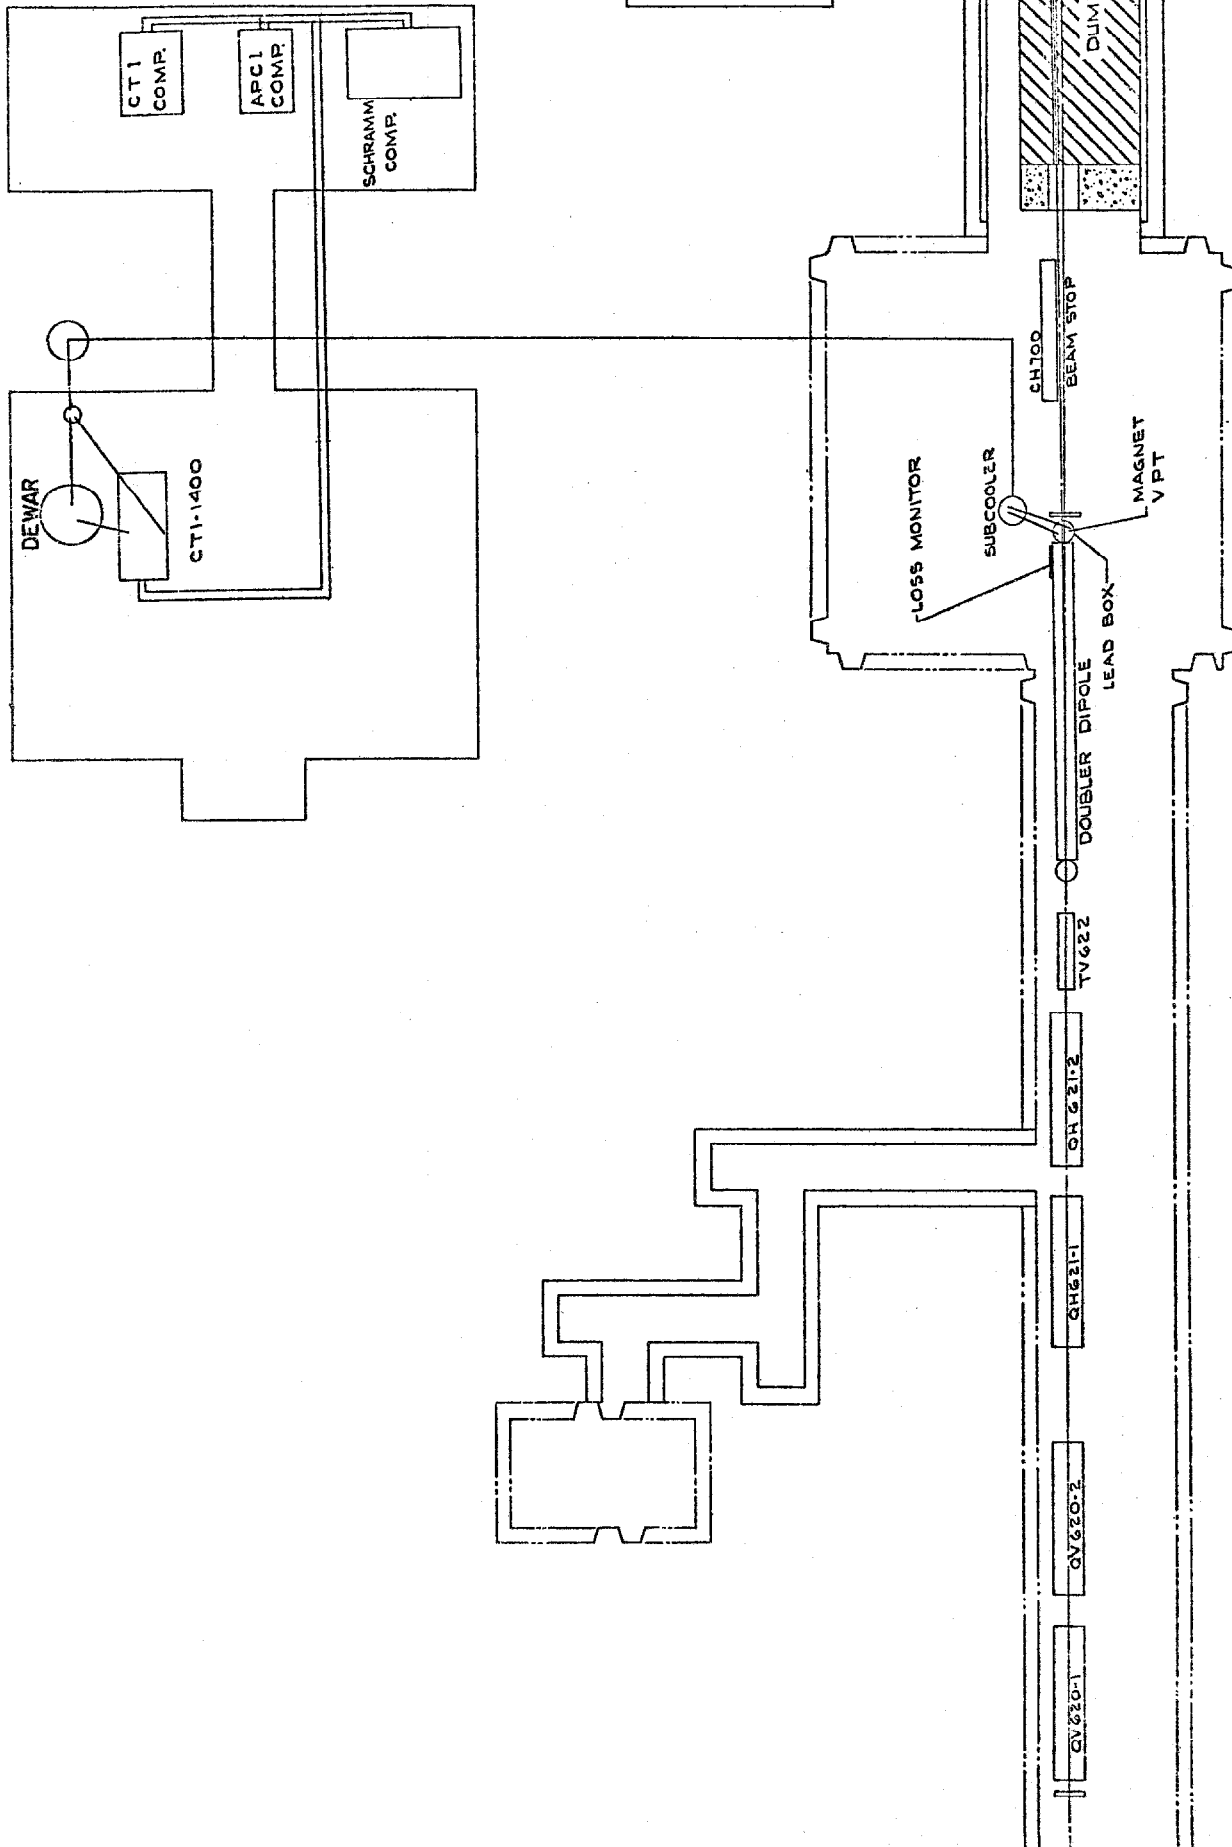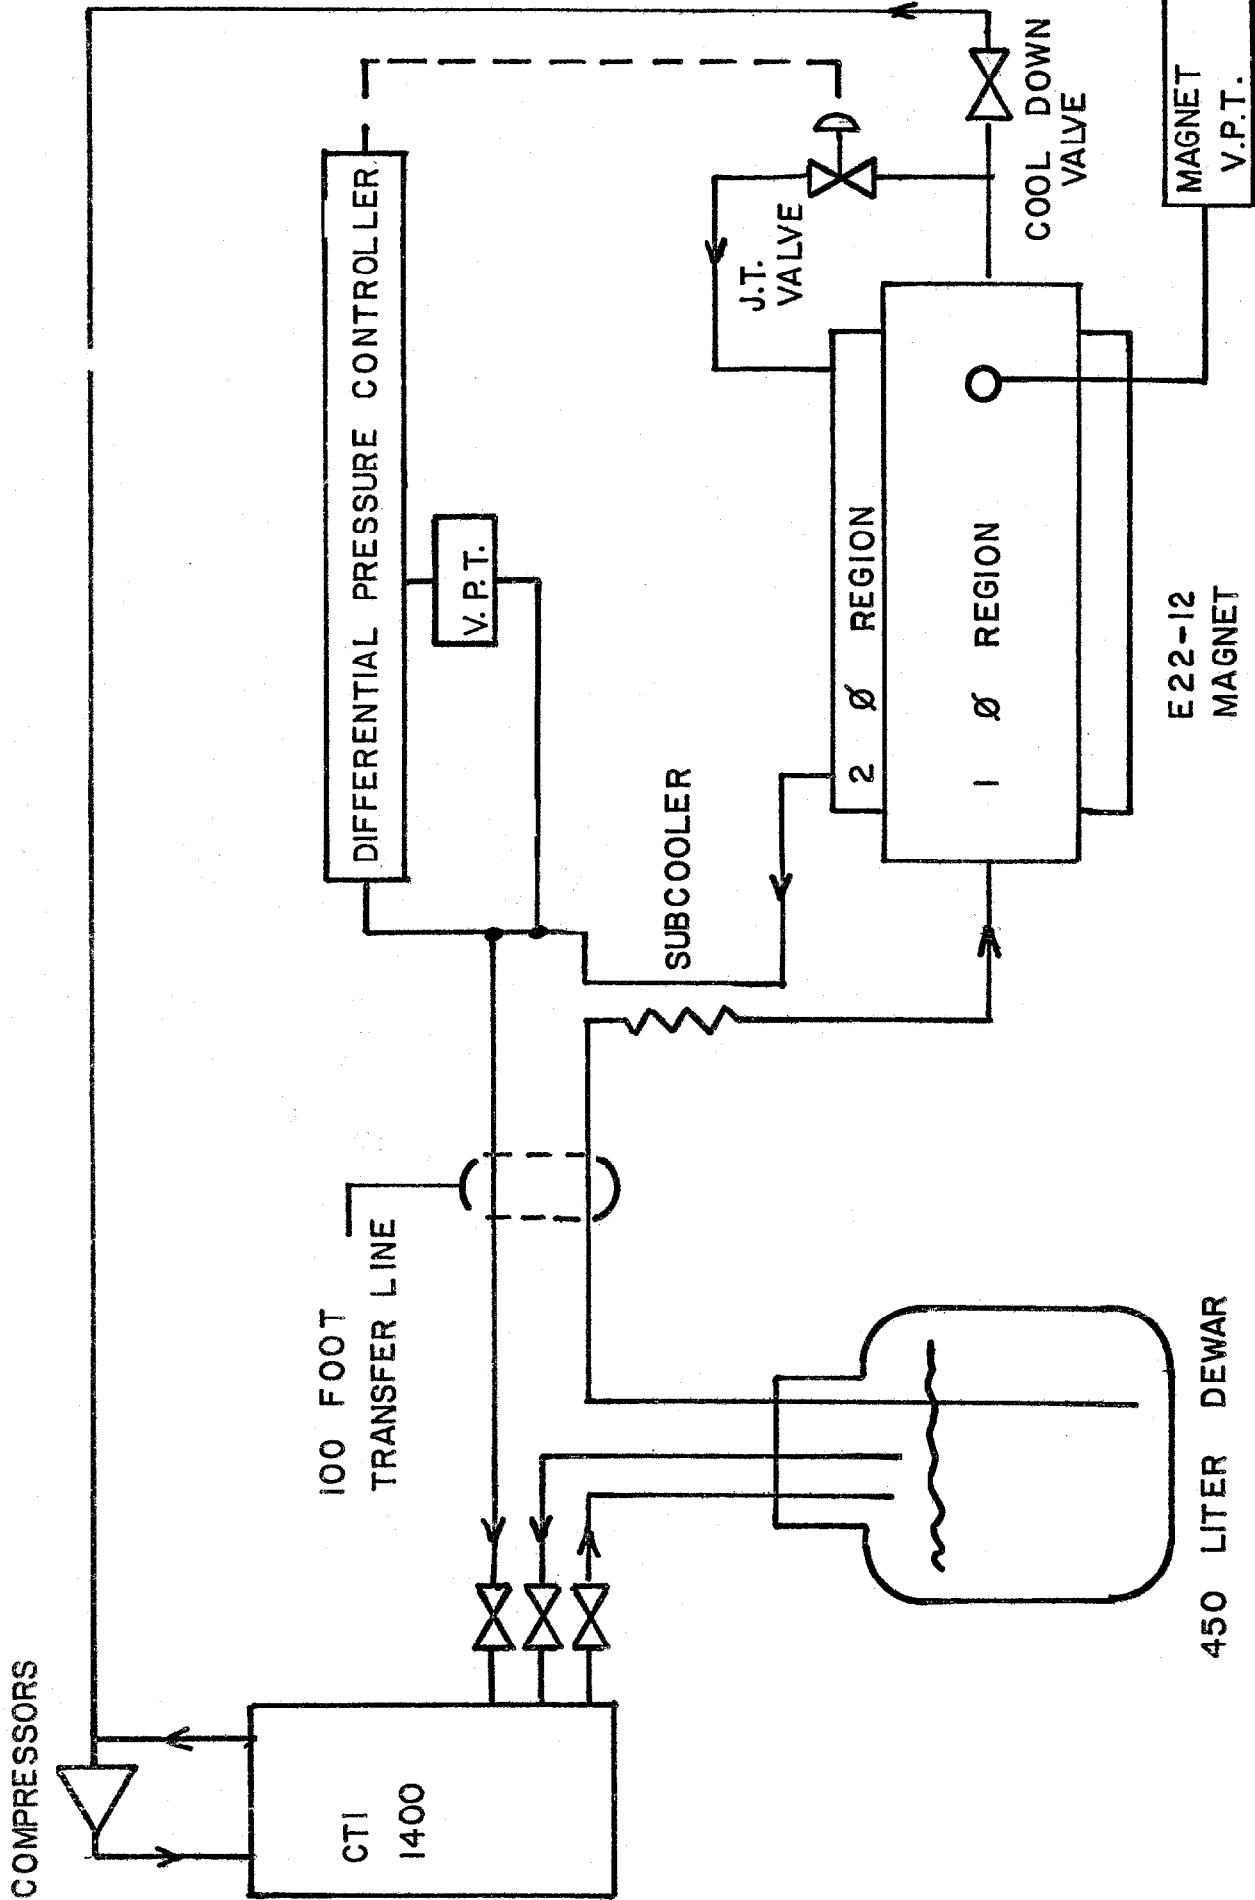
SCHEMATIC OF REFRIGERATION SYSTEM

FIGURE 2A

TURN OFF
FIRING
CIRCUIT

BRIDGE
IMBALANCE
DETECTOR

POWER
SUPPLY
5000
AMPS

FREE WHEELING
DIODE

.065 Ω

E22-12
.043 H

SUPERCONDUCTING
DIPOLE MAGNET
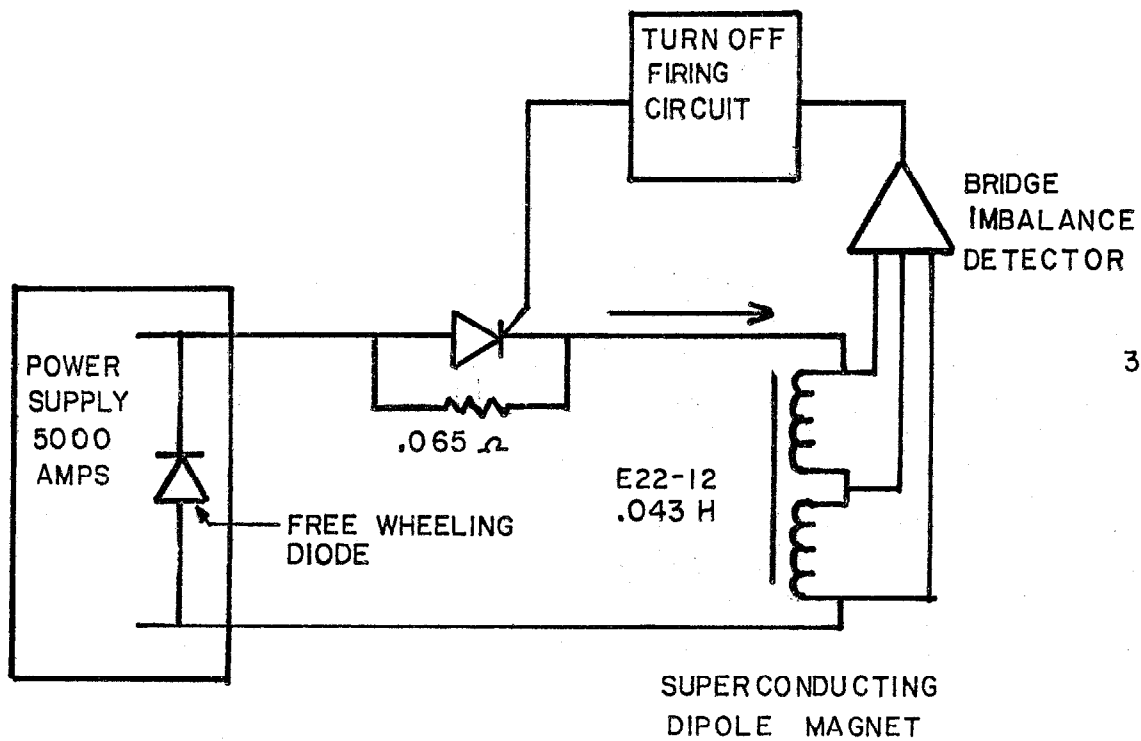
QUENCH DETECTOR AND
PROTECTION CIRCUITRY

3500

CURRENT (AMPS)

0   TIME   (SECONDS)   1.
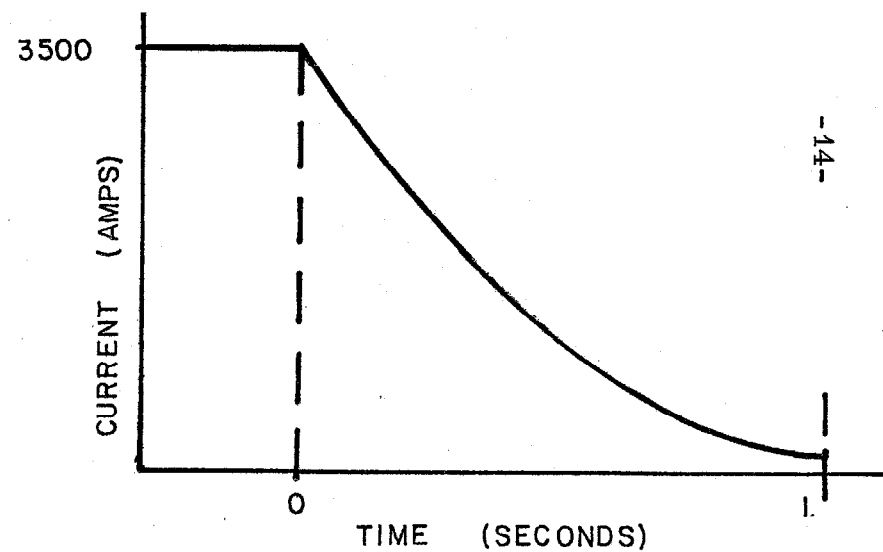
MAGNET CURRENT VERSUS
TIME DURING QUENCH

-14-

TM-828-A
1620.000

FIG. 2B

GEOMETRY I

UPSTREAM   SCHEMATIC
END   E 22-12   PLAN VIEW
                                  ORIENTATION   E22-12

2"   PROTON BEAM 18MM × 15MM region (ellipse with hatched circle)

PROTON BEAM
18MM × 15MM

|← 2.9" →|

INCIDENT
400 GEV/C
PROTONS

GRAZING
IMPACT
AREA

3500 A.

2300 A.
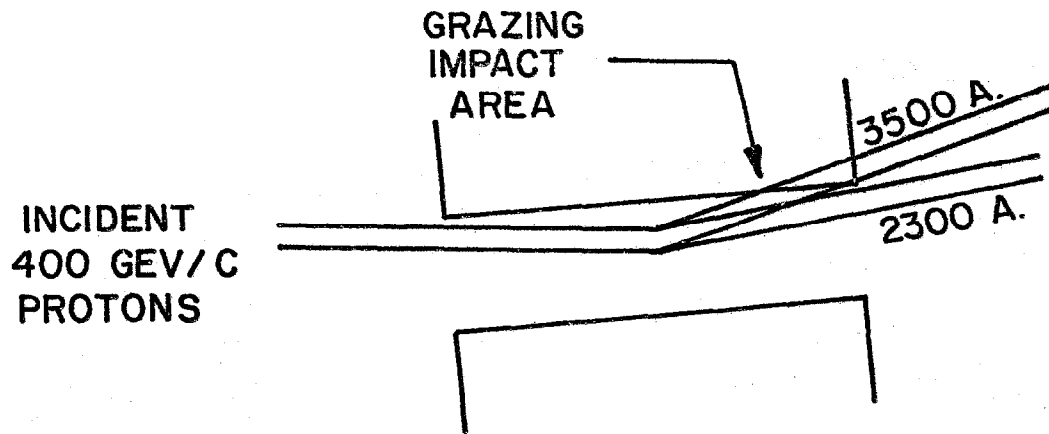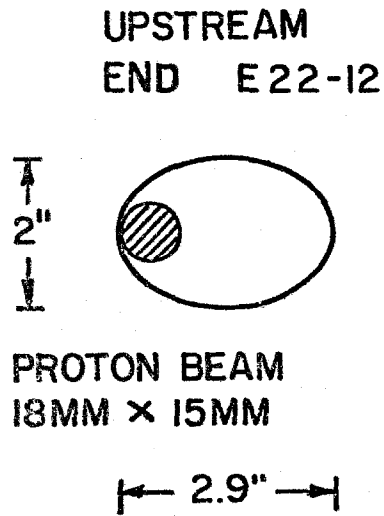
FIG. 3A

GEOMETRY II

UPSTREAM END
E 22-12

UPPER

PERPENDICULAR IMPACT AREA

LOWER
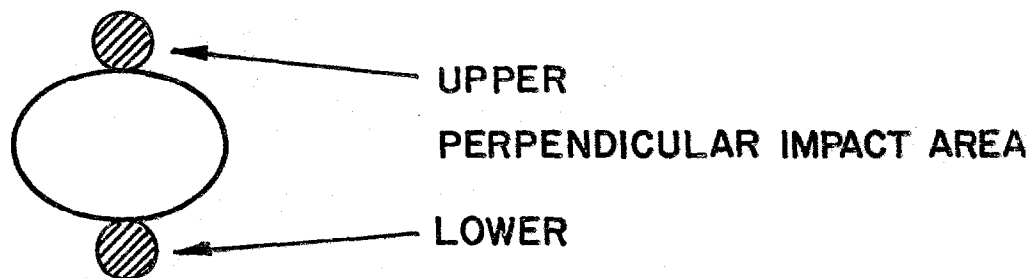
FIG 3B
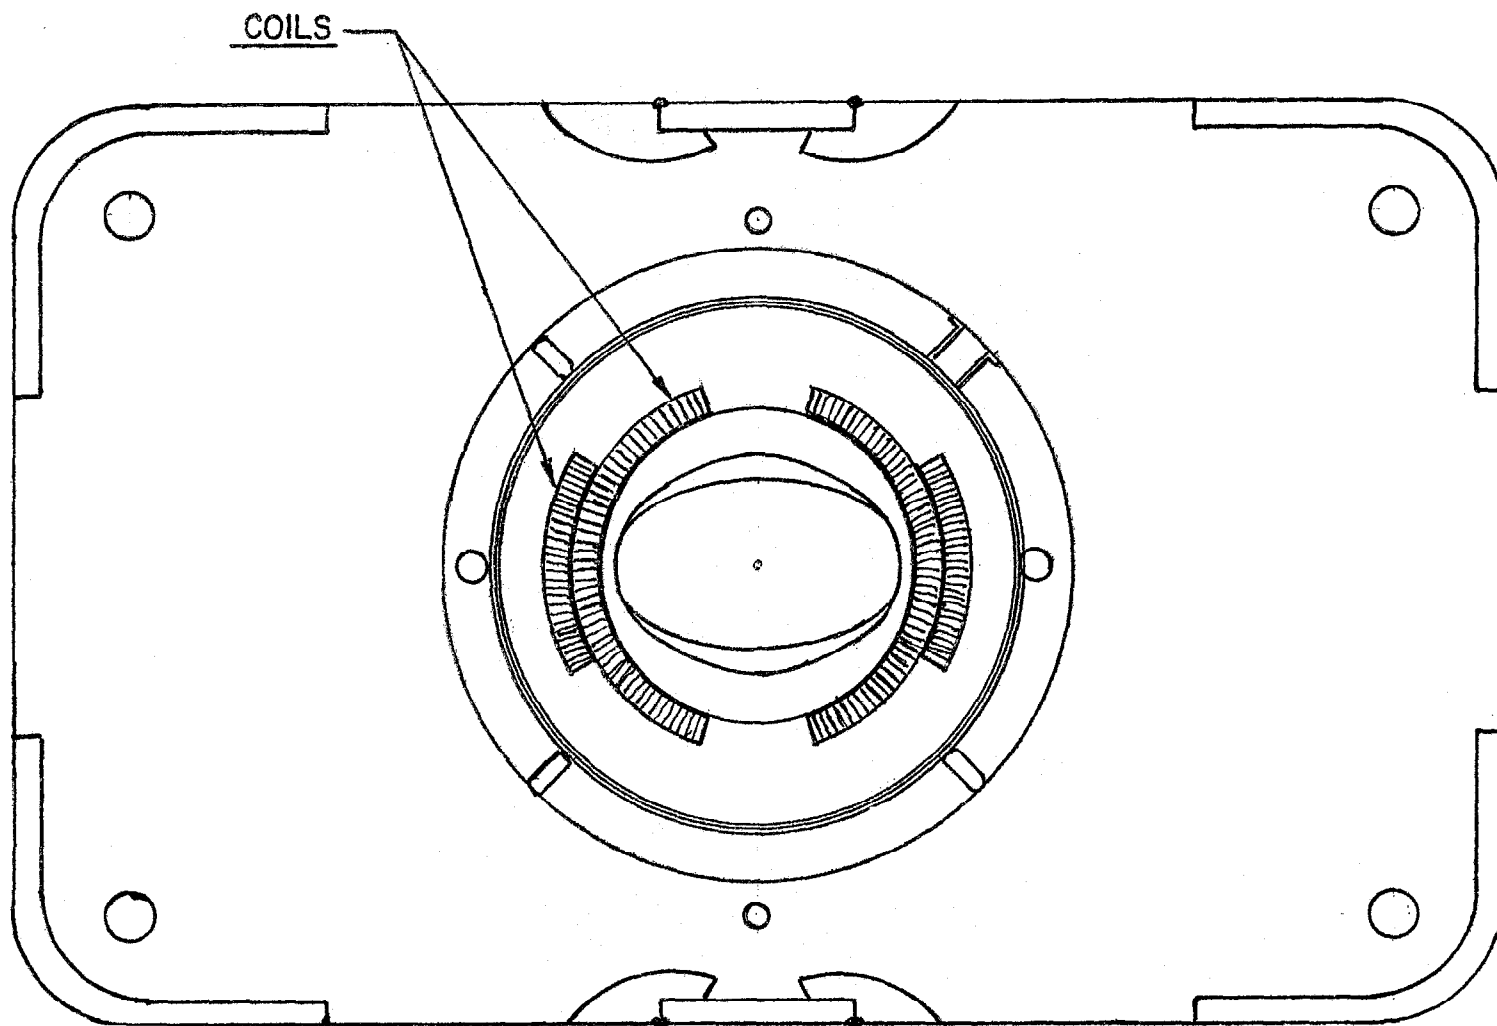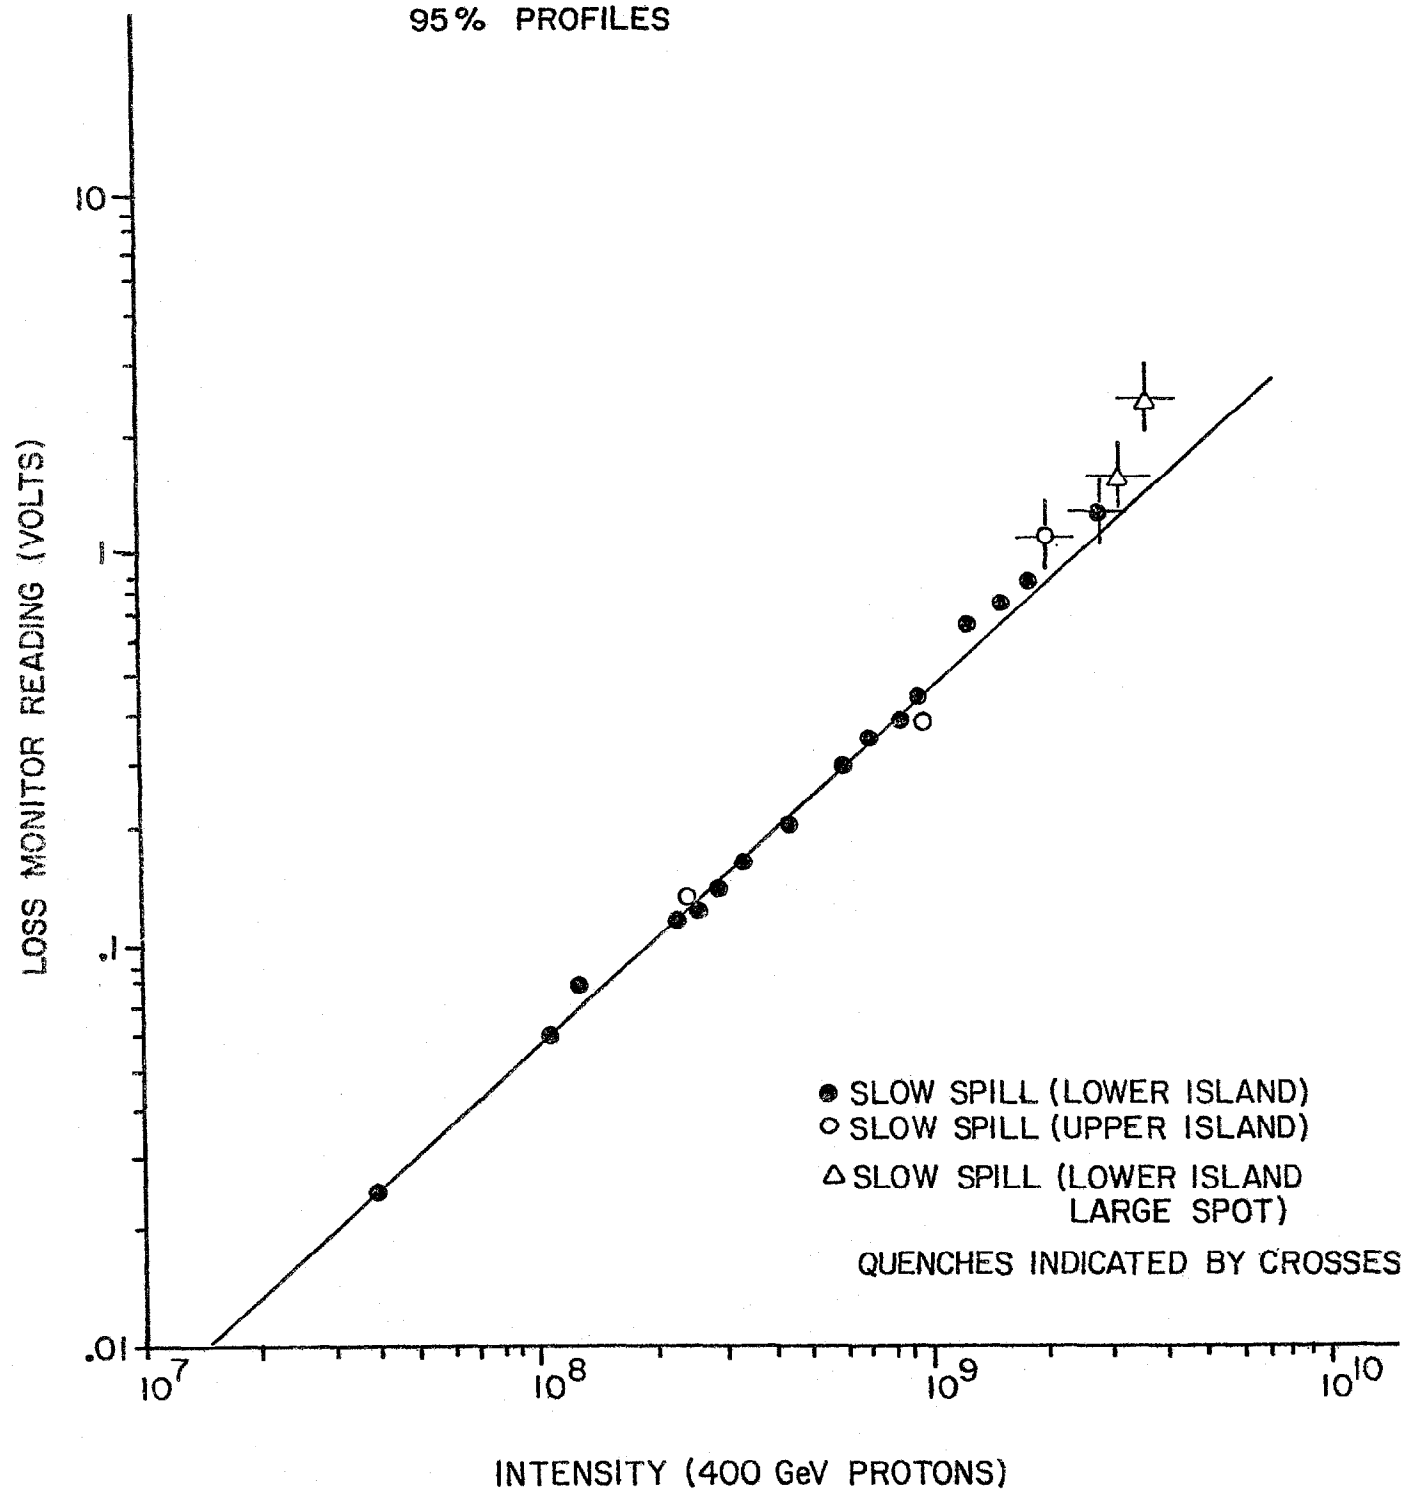
FIGURE 3c

GEOMETRY I
3500 AMPS
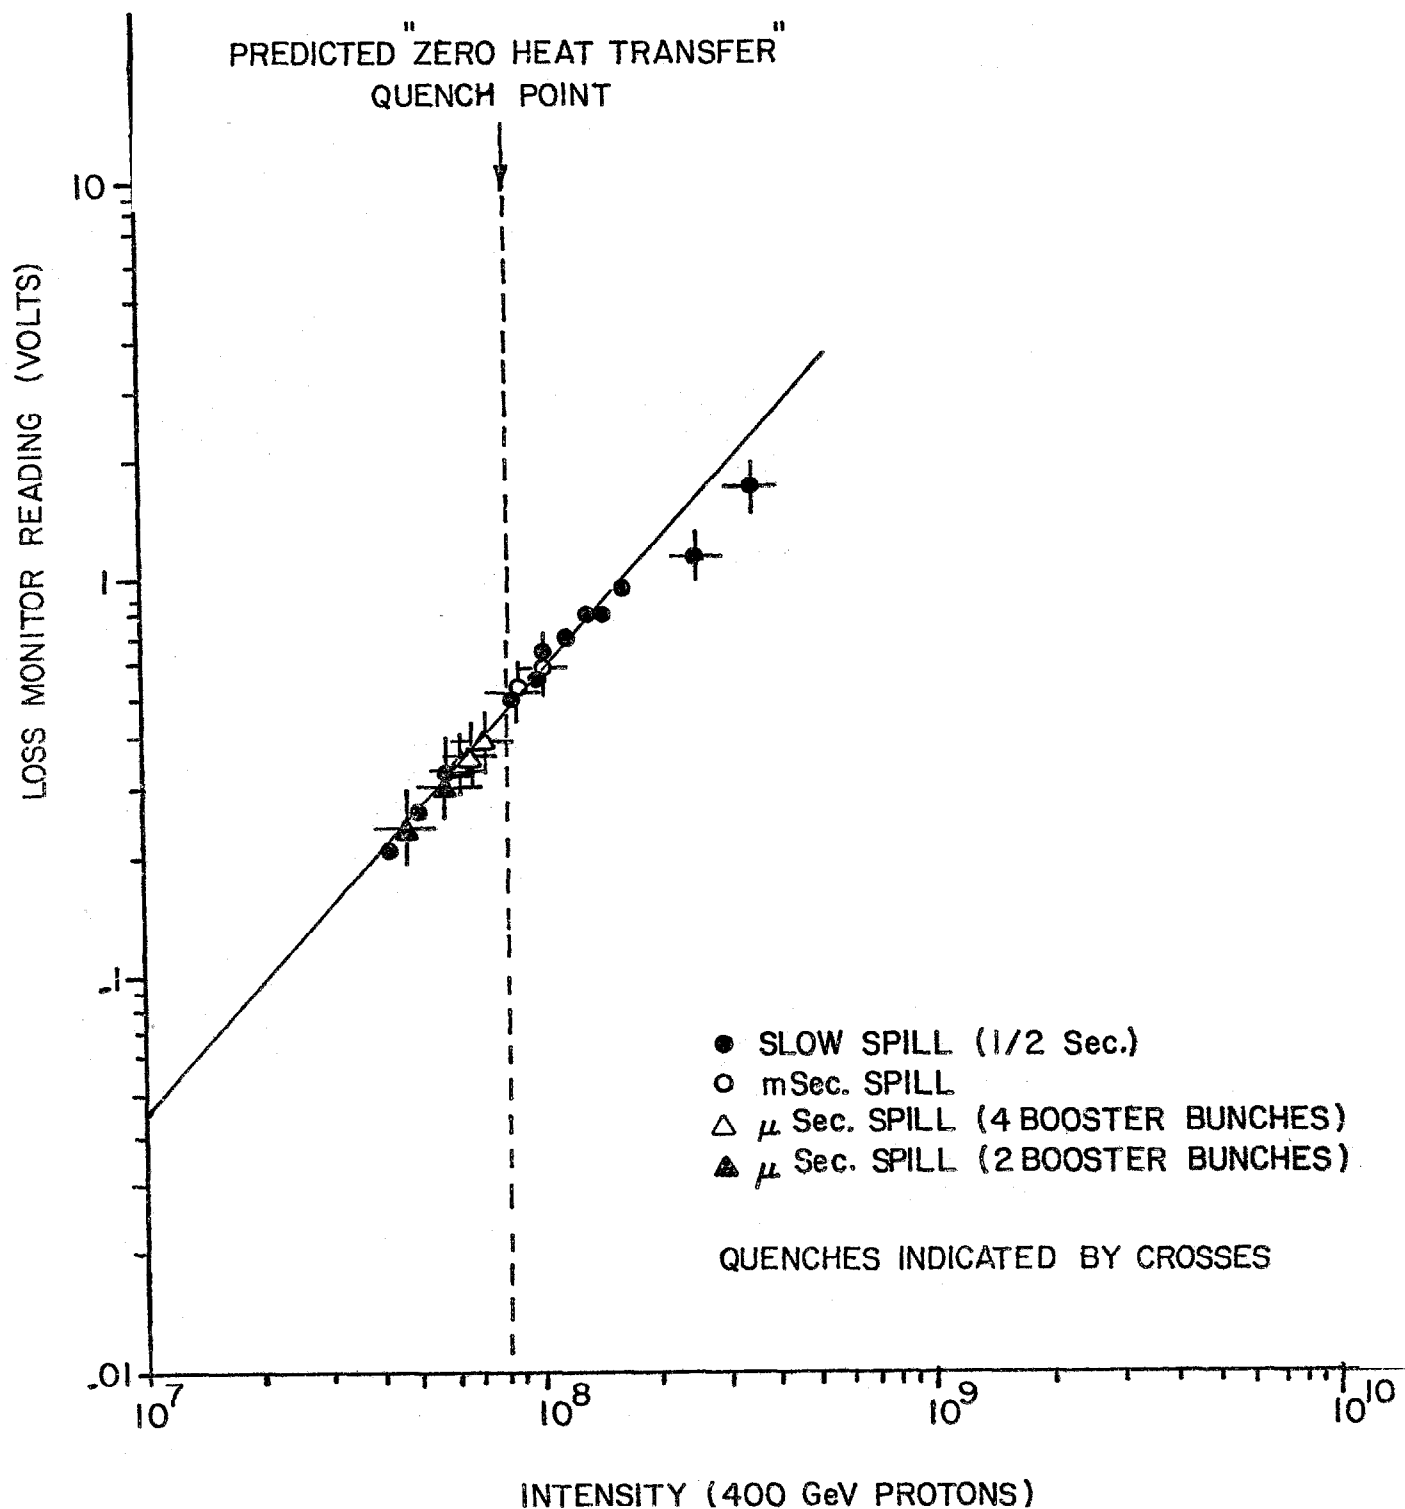
FIGURE 4

FIGURE 5

GEOMETRY II

DOUBLER DIPOLE QUENCH POINT
VS DIPOLE CURRENT

FIGURE 6